

Remote Monitoring Unit RMU-V8



Your Automation Partner

Features

- 2 Opto-Isolated Digital Inputs, 1 Relay Output
- Pre-paid or post-paid SIM Card, from any Telco
- 32-bit Cortex-M3 Microprocessor
- Support SMS to pager, fax, email and or server
- Only support Over the AIR programming, programming and configuration done via sending predefine sms to the rmu.
- Modem Specs : Quad Core or 4G

Technical Specification

Operating Condition

Supply Voltage	12VDC
Supply Current (ideal mode)	150mA - 200mA

Digital Input

No. of Input	2
Input Type	Optically Isolated
Input Voltage Range	9V to 36VDC


Digital Output

No. of Output	1
Output Type	Relay
Contact Rating	3A @ 240VAC


Analogue Input

No. of Analog Input	2 (max)
Analog Type	4 - 20mA
ADC Resolution	12-bit (0-4096)

Input Circuit

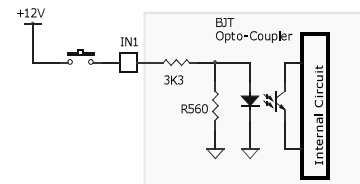

Output Circuit

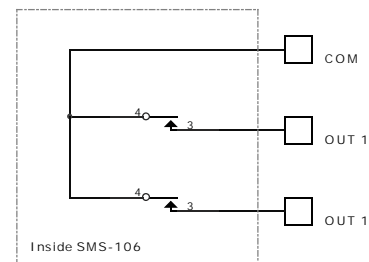

Cloud Monitoring...

Distributor

LKS (M) SDN BHD

No.15, Jalan Anggerik Mokara, 31/63, Kota Kemuning, 40460 Shah Alam, Selangor

Tel : +603 - 5124 0822 Fax : +603 - 5124 0222 E-mail : info@lkssb.com Website : www.lkssb.com